

linear dimension(Tolerances Standard GB/T 14486-2008)										—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to			
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	22.05.04

UL/CUL 技术参数



UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage	V	300	- 300
额定电流	Rated Current	A	10	- 10
接线范围	Wire Range	24-12		
单/多芯线	Solid/Stranded	AWG		
耐电压	Withstanding Voltage	AC1600V/1Min		

IEC 技术参数

IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage	V	- 320	630
额定电流	Rated Current	A	- 15	15

额定冲击电压	Impulse withstand voltage	kV	-	4.0	4.0
导线截面积	Conductor cross section	mm ²	25		
硬质/柔性导线	Solid/flexible	mm ²			

材 料		Material	
绝缘材料	Insulation Material	PA66	
阻燃等级	Inflammability		
导体材料	Conductor Material	铜合金 Copper alloy	
导体表面镀层	Conductive Coating	镀镍 Ni plating	
—般参数 Other Data			
间距 Pitch	[mm]	5.0	
极数 Poles	[P]	2-24	
剥线长度 Stripping Length	[mm]	9-10	
螺丝 Screw/扭矩 Torque(Max)	[N.m]	M2.5/0.4	
工作温度 Operating temperatur	[°C]	-40~+105	
引脚尺寸 Pin Dimensions	[mm]	-	
PCB板孔径 PCB Hole Diameter	[mm]	-	

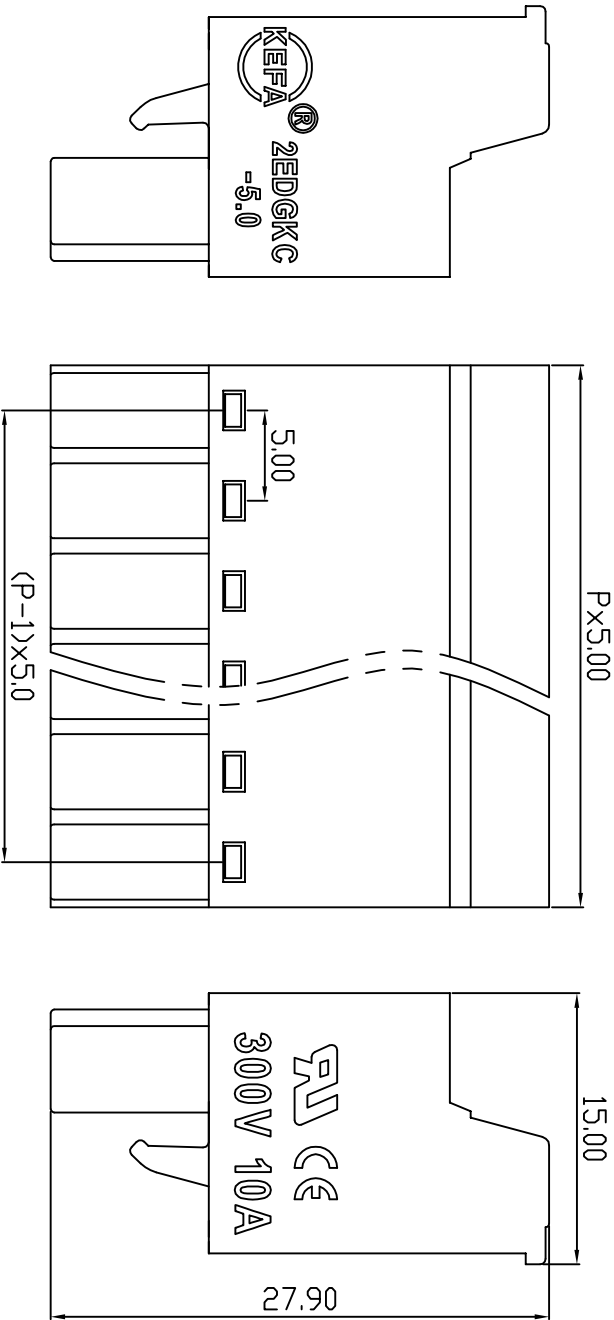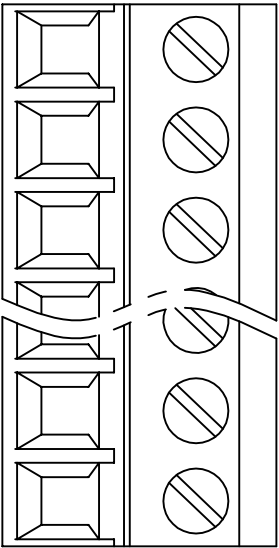

DES.	LQQ	DATE	22.05.04	单位 / UNITS mm 尺寸 / SIZE A4 比例 / SCALE 1:1				第三视角/THIRD ANGLE PROJECTION 			版本 / REV	A
CHK.	BY	DATE	22.05.04	 慈溪市科发电子有限公司 CXI KEFA ELECTRONIC CO., LTD								
APP.	CLF	DATE	22.05.04									
				名称 / TITLE		KF2EDGKC-5.0						